

CSP SAW Filter


Feature

- Small Size
- High Reliable
- Automatic mount by tape and reel

Specifications

Applications	P/N	Fo[MHz]	BW[MHz]	Zo[Ω]	Size[mm ²]	Status	Remark
W/L Modem	SA722AQ	722.0	11.42	50 - 50	1.4 x 1.1 x 0.7	MP	Single to Balanced
W/L Modem	SA915LQ1	915.0	25.0	50 - 50	1.4 x 1.1 x 0.7	MP	Single Ended
GPS	SA15758Q1	1575.42	2.0	50 - 50	1.4 x 1.1 x 0.7	MP	Single Ended
	SA1575TQ1	1575.42	2.0	50 - 100	1.4 x 1.1 x 0.7	MP	Single to Balanced
	SA1575XQ	1575.42	2.0	50 - 50	1.4 x 1.1 x 0.7	MP	Single Ended
	SA1575YQ	1575.42	2.0	50 - 50	1.4 x 1.1 x 0.7	MP	Single Ended
GPS+GLONASS	SA1588AQ1	1588.655	34.47	50 - 50	1.4 x 1.1 x 0.7	MP	Single Ended
	SA1591AQ1	1591.5	35.0	50 - 50	1.4 x 1.1 x 0.7	MP	Single Ended
Cellular	SA1900AQ1	1900.0	40.0	50 - 50	1.4 x 1.1 x 0.7	MP	Single Ended
W/L Modem	SA1902AQ1	1902.0	34.9	50 - 200	1.4 x 1.1 x 0.7	MP	Single to Balanced
	SA2017EQ1	2017.5	15.0	50 - 50	1.4 x 1.1 x 0.7	MP	Single Ended
TD-SCDMA	SA2017FQ1	2017.5	15.0	50 - 200	1.4 x 1.1 x 0.7	MP	Single to Balanced
	SA2017GQ1	2017.5	15.0	50 - 200	1.4 x 1.1 x 0.7	MP	Single to Balanced
	SA2185CQ1	2185.0	30.0	50 - 50	1.4 x 1.1 x 0.7	MP	Single Ended
LTE	SA751AQ1	751.5	11.0	50 - 50	1.4 x 1.1 x 0.7	ES	Single Ended
	SA781AQ1	781.5	11.0	50 - 100	1.4 x 1.1 x 0.7	ES	Single to Balanced
PTT	SA813AQ1	813.5	15.0	50 - 50	1.4 x 1.1 x 0.7	ES	Single Ended
	SA858AQ1	858.5	15.0	50 - 150	1.4 x 1.1 x 0.7	ES	Single to Balanced
AWS	SA1732BQ1	1732.5	45.0	50 - 50	1.4 x 1.1 x 0.7	ES	Single Ended

Products with specific requirements are available upon request.

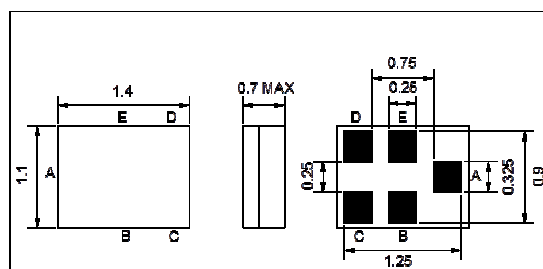

Single to Balanced Type

Single Ended Type

Pin Description	
A	In
C, D	Out
B, E	Ground

Pin Description	
A	In
D	Out
B, C, E	Ground