

Crystal Unit UM-Series SMD Mountable

Features


- Good performance (tight tolerance and stability available)
- Excellent heat resistance and environmental characteristics.

Specifications

UM-SERIES	FUNDAMENTAL ; 3 RD OT	
Frequency	10.0 MHz – 200 MHz	
Load capacitance (CL)	8 pF – 32 pF, series	
Frequency tolerance (@25°C)	±10 ppm ... ±50 ppm	
Frequency stability	±10 ppm ... ±50 ppm	
Operating temperature range	-40°C - +85°C	
ESR	25-75 Ω max.	
Dimension	Refer to Drawing	

- Please consult us for customized specifications.

Dimension

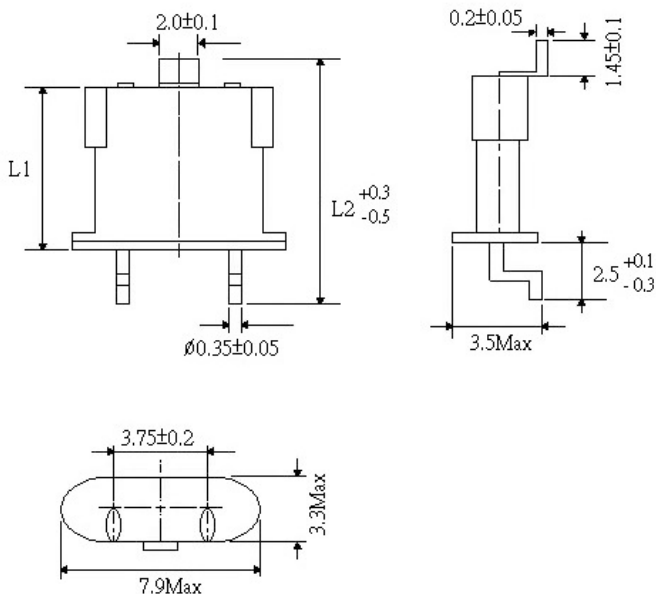

MODEL	L1(max)	L2
UM-1	8.0	11.9
UM-5	6.0	9.9
UM-4	4.3	7.2