

TAS-3225H

Features

- Small size ceramic package with reduced height (0.70 mm ± 0.05mm)
- Hermetic Sealing by Au-Sn method, **Frequency starting from ~ 9.0 MHz**
- Suitable for NFC, Bluetooth, OA and AV
- Products are supplied on tape and reel, ROHS conform


Specifications

TAS-3225H	
FREQUENCY	9 - 13 MHz
LOAD CAPACITANCE (CL)	8 PF – 20 PF
Frequency tolerance (@25°C)	± 10 ppm ... ± 20 ppm
Frequency stability	± 10 ppm +/- 15 ppm
Operating temperature range	-35°C - +85°C
ESR	100 - 200 Ω max. (9 - 12 MHz) 50 - 100 Ω max. (12 - 13 MHz)
Dimension	3.2 x 2.5 x 0.70 mm

- Please consult us for customized specifications.

Dimension

■ Outline

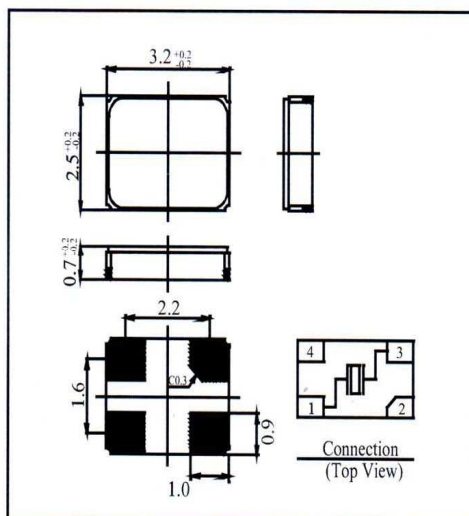

■ Reference Land Pattern

