

High Frequency Fundamental Monolithic Crystal Filters MCF 7050HF – 4 pole


Features

- Surface Mount Package
- 6 pad 7.0 x 5.0 x 1.3 mm (Low Profile)
- RoHS Compliant, Lead Free Construction
- High Stability temperature Range
- Excellent Attenuation Guaranteed
- Automatic Insertion Available

Specifications

ITEM	
Nominal Frequency Range	70.0 ~ 270.0 MHZ
Mode	Fundamental
No. of Pole	4
Pass Bandwidth	$\pm 7.5 \sim 15.0$ kHz / 3 dB
Stop Bandwidth	TBD (e.g.30 dB / $\pm 25 \sim \pm 60$ kHz)
Passband Ripple	TBD (e.g. 1.0 dB max.)
Insertion Loss	TBD (e.g. 3.0 dB max.)
Ultimate Attenuation	TBD (e.g. 70 dB min. / - 910 kHz)
Terminating Impedance	TBD

Dimension

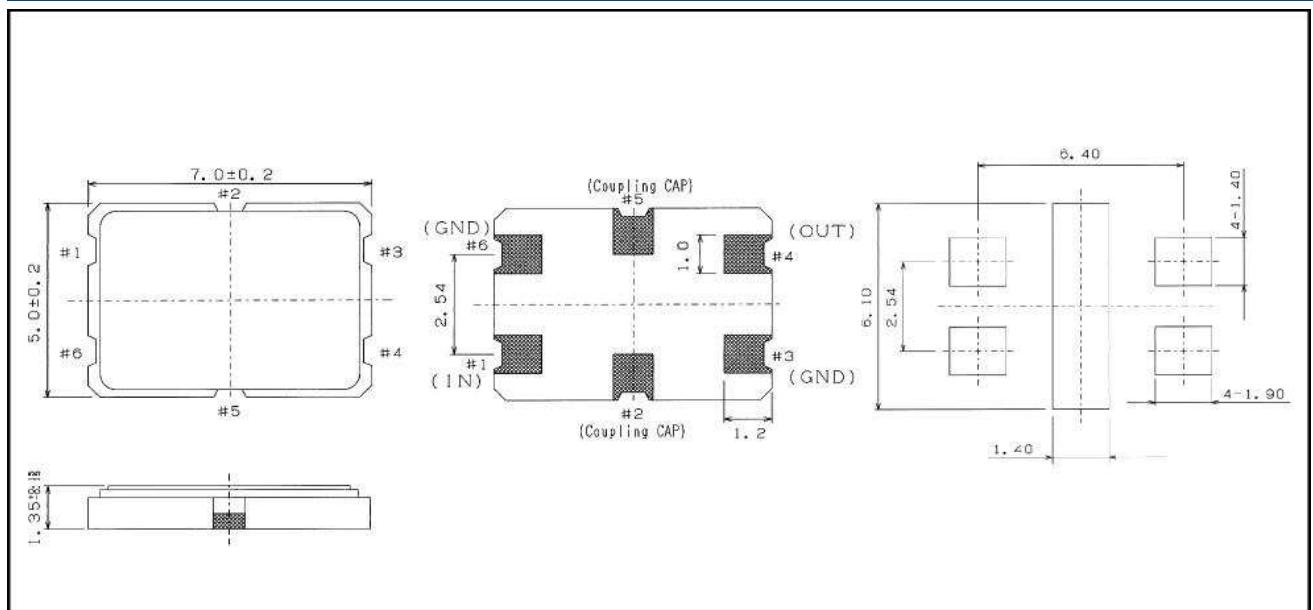

Product Partner: