

## TAS-4025 (Not recommended for new development)

### Features

- Small size ceramic package with reduced height (0.65 mm ± 0.05mm)
- High precision and high reliability, excellent performance in ESR
- Suitable for NFC, Bluetooth, WLAN, ZigBee where ESR values are of concern
- Products are supplied on tape and reel, ROHS conform


### Specifications

TAS-4025A	
Frequency	12 - 100 MHz
Load capacitance (CL)	5 pF - 20 pF, series
Frequency tolerance ( @25°C)	±10 ppm ... ±50 ppm
Frequency stability	± 5 ppm ... ±50 ppm
Operating temperature range	-35°C - +85°C
ESR	40 ... 150 Ω max.
Dimension	4.0 x 2.5 x 0.65 mm

- Please consult us for customized specifications.

### Dimension

#### ■ Outline

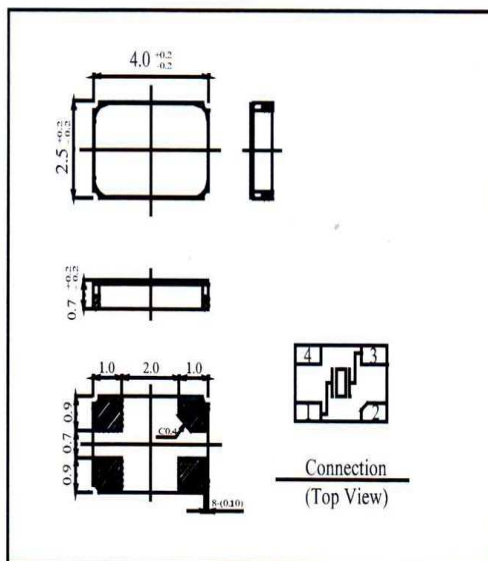

#### ■ Reference Land Pattern

