


VTX 7S-LG


Low G-sensitive, vibration and shock resistant
Temperature compensated (VC)TCXO



Frequency range	5.000 ~ 52.000 MHz		
Standard frequencies (fundamental)	10, 12, 13, 15.36, 16.368, 20, 25, 27, 30, 40 and 50 MHz		
Frequency stability:			
vs. temperature referenced to (F _{MAX} +F _{MIN})/2	≤ ±0.50 ppm	over -40 to +85 °C	(*)
vs. supply voltage changes referenced to frequency at nominal supply	≤ ±0.1 ppm	±5 %	
vs. load changes referenced to frequency at nominal load	≤ ±0.1 ppm	±5 %	
vs. aging @ +40 °C	≤ ±1.0 ppm	1st year	
G-sensitivity	0.25 ppb/g	per axis	(*)
Frequency tolerance ex. factory @ +25 °C	0 ~ +1.0 ppm	@ +25 °C	
Supply voltage (nominal value ±5 %)	+2.8 V, +3.3 V or +5.0 V		(*)
Output signal	Clipped sine wave	(LV)CMOS	(*)
Output level	> 0.8 V _{p-p}	V _{OH} > 0.9*V _{CC} / V _{OL} < 0.1*V _{CC}	
Output load	10 kΩ // 10 pF	15 pF Max.	
Current consumption, depending on frequency	1.5 ~ 7 mA	2 ~ 10 mA	
Electronic Frequency Control (EFC)	ΔF = ±5 to ±10 ppm	positive slope	(*)
Control voltage (Vc)	+1.50 V ±1.0 V for 3.3 V	+2.50 V ±2.0 V for 5.0 V	(*)
EFC input impedance	> 100 kΩ		
Tri-state function	pin #9 → high or open pin #9 → low or GND	pin #6 → oscillation pin #6 → high impedance	
Phase noise (typical value for 40 MHz)	-90 dBc/Hz -118 dBc/Hz -140 dBc/Hz -151 dBc/Hz -156 dBc/Hz	@ 10 Hz @ 100 Hz @ 1 kHz @ 10 kHz @ 100 kHz	
Operating temperature range	-40 ~ +85 °C		(*)
Storage temperature range	-55 ~ +105 °C		
Reflow Profiles as per IPC/JEDEC J-STD-020C	≤ 260 °C over 10 sec. Max.		
Moisture sensitivity	Level 1 (unlimited)		

(*) See available options on page #2


Note: Unless otherwise specified conditions are @+25 °C

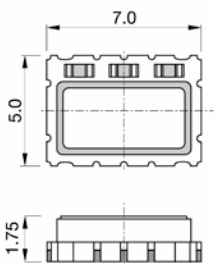

Pin function


- # 1 Vc (EFC) for VC-TCXO
GND or NC for TCXO
- # 5 GND
- # 6 Output
- # 9 Tri-state or NC
- # 10 Vcc

Soldering pattern


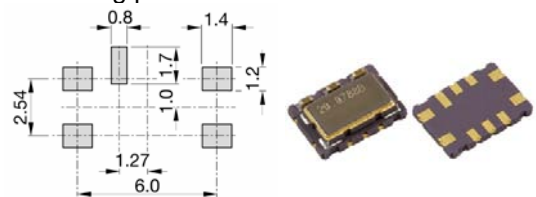


Do not contact #2, #3, #4, #7 & #8

Test circuit for CMOS

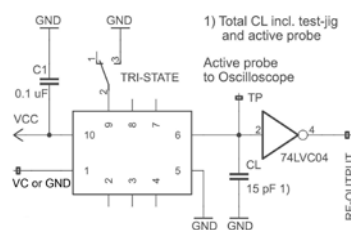


Test circuit for Clipped Sine Wave

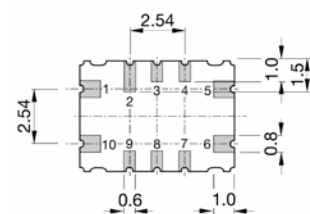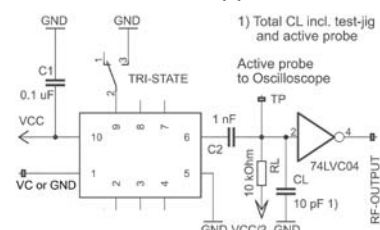

VTX 7S-LG

Low G-sensitive, vibration and shock resistant
Temperature compensated (VC)TCXO

QuartzCom
the communications company



Ordering code

(0)7S-(1)(2)-(3)(4)-(5)(6)-40.000MHz

Example: VT7S-C33-NNu50-V05GC-20.000MHz

Oscillator type	(1) Output signal	(2) Supply voltage	(6) G-sensitivity per axis
TX = TCXO VT = VC-TCXO	H = (LV)CMOS C = Clipped sine wave	28 = 2.8 V 30 = 3.0 V 33 = 3.3 V 50 = 5.0 V	GA = 0.10 ppb/g GB = 0.25 ppb/g GC = 0.50 ppb/g GD = 1.00 ppb/g GE = 1.50 ppb/g GZ = special spec
(3) Operating temperature	(4) Frequency stability	(5) Pulling range (VT only)	
JK = -20 to +70 °C NN = -40 to +85 °C NP = -40 to +95 °C NR = -40 to +105 °C QN = -55 to +85 °C	u25 = ± 0.25 ppm u50 = ± 0.50 ppm 1u0 = ± 1.00 ppm 1u5 = ± 1.50 ppm	V05 = 1.5 ± 1.0 V ±5 ppm V10 = 1.5 ± 1.0 V ±10 ppm X05 = 2.5 ± 2.0 V ±5 ppm X10 = 2.5 ± 2.0 V ±10 ppm Z = special spec	

Frequency stability vs. temperature

ppm	≤± 0.25	≤± 0.50	≤± 1.00	≤± 1.50
-20 to +70 °C	Δ	○	○	○
-40 to +85 °C	Δ	Δ	○	○
-40 to +95 °C	Δ	Δ	Δ	○
-40 to +105 °C	Δ	Δ	Δ	Δ
-55 to +85 °C	X	Δ	Δ	Δ

Δ Ask factory
○ Available
X Not available

G-Sensitivity performance

Noise shape vibration from 20-2'000 Hz with 0.1 g²/Hz (G_{RMS} = 14.11g) for the axis

The table shows the averaged values of the G-Sensitivity in the range 20 Hz to 1000 Hz.

Definitions of vibration axes	G-Sensitivity (averaged 20 Hz – 1000 Hz)																									
	TX7S-C33-NNu50-CC-20.0 MHz																									
	<table border="1"> <thead> <tr> <th>Osc-#</th> <th>X-axis [1/g]</th> <th>Y-axis [1/g]</th> <th>Z-axis [1/g]</th> <th>Gamma Γ [1/g]</th> </tr> </thead> <tbody> <tr> <td>B01</td> <td>0.068</td> <td>0.024</td> <td>0.129</td> <td>0.148</td> </tr> <tr> <td>B02</td> <td>0.047</td> <td>0.017</td> <td>0.128</td> <td>0.137</td> </tr> <tr> <td>B03</td> <td>0.058</td> <td>0.024</td> <td>0.113</td> <td>0.129</td> </tr> <tr> <td>B04</td> <td>0.052</td> <td>0.02</td> <td>0.142</td> <td>0.152</td> </tr> </tbody> </table>	Osc-#	X-axis [1/g]	Y-axis [1/g]	Z-axis [1/g]	Gamma Γ [1/g]	B01	0.068	0.024	0.129	0.148	B02	0.047	0.017	0.128	0.137	B03	0.058	0.024	0.113	0.129	B04	0.052	0.02	0.142	0.152
	Osc-#	X-axis [1/g]	Y-axis [1/g]	Z-axis [1/g]	Gamma Γ [1/g]																					
	B01	0.068	0.024	0.129	0.148																					
	B02	0.047	0.017	0.128	0.137																					
B03	0.058	0.024	0.113	0.129																						
B04	0.052	0.02	0.142	0.152																						

